

Z1170 GREASE INTERCEPTOR




ENGINEERING SPECIFICATION

Zurn Z1170 grease interceptor features acid resistant coated interior and fabricated steel exterior, PDI rated at ___ gpm and ___ lb grease capacity, internal air relief bypass, bronze cleanout plug, removable pressure equalizing/flow-diffusing inlet baffle, fixed bottom outlet baffle, and visible double wall trap seal. Gasketed, non-skid, secured cover comes complete with center tie down assembly with Z1108 flow control fitting. Regularly furnished with a high inlet and outlet connection.

NOTES

Location of outlet from bottom of interceptor cannot be changed.

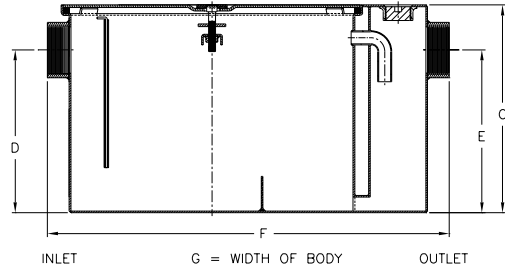

PREFIXES	DESCRIPTION	SIZE	LIST PRICE
Z1170*	Acid Resistant Coated Fabricated Steel	100	2,515.00
		200	3,486.00
		300	4,101.00
		400	6,071.00
		500	7,429.00
		600	8,348.00
		700	10,317.00
		800	13,662.00
SUFFIXES		SIZE	ADD
-AL	Aluminum Cover	100-400	1,356.00
		500-800	1,900.00
-DI	Dual High/Low Inlet		403.00
			EA. ADDITIONAL 1" OVER 6" UP TO 6"
-E	Acid Resistant Coated interior and exterior fabricated steel extension section (specify 'C' dimension required) for recessed installation.	100	-
		200	-
		300	230.00
		400	259.00
		500	292.00
		600	333.00
		700	365.00
		800	422.00
		SIZE	ADD
-HD	Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load. A 3" minimum extension height is required when Heavy Duty Cover (-HD) option is specified.	300	7,157.00
		400	7,911.00
		500	8,285.00
		600	8,749.00
		700	12,038.00
		800	13,209.00
-K	Anchor flange 1-3/4" down from top and 2" wide. A 3" minimum extension height is required when anchor flange (-K) option is specified (specify 'C' dimension required).	100	-
		200	-
		300	1,429.00
		400	1,429.00
		500	1,542.00
		600	1,605.00
		700	1,687.00
		800	1,719.00

SUFFIXES		SIZE	ADD
-KC	Anchor flange 1-3/4" down from top and 2" wide with clamp collar. A 3" minimum extension height is required when anchor flange (-KC) option is specified.	100	-
		200	-
		300	1,719.00
		400	1,719.00
		500	1,917.00
		600	1,990.00
		800	2,264.00
-L	Angle type (Z1108-L) flow control device with plunger		N/C
-PW	Plug Wrench		83.00
-R	Acid resistant coated interior and exterior fabricated steel recessing receiver for recessed installation is equipped with adjustable support brackets and gasketed non-skid cover with removable lift handles.	100	5,772.00
		200	6,611.00
		300	6,890.00
		400	7,376.00
		500	7,850.00
		600	8,015.00
		700	8,054.00
800	8,881.00		
-RE	Acid resistant coated interior and exterior fabricated steel recessing receiver enclosed type for recessed installation. Furnished with adjustable support brackets and gasketed, non-skid, secured cover with removable lift handles.	100	6,600.00
		200	7,623.00
		300	7,985.00
		400	8,699.00
		500	9,375.00
		600	9,697.00
		700	10,566.00
800	11,128.00		
-T	Cover recessed for tile/terrazzo. A 3" minimum extension height is required. (Specify 'C' dimension and required recess depth: 1/8", 3/4", or 1-1/4".)	100	-
		200	-
		300	5,108.00
		400	6,195.00
		500	6,927.00
		600	8,007.00
		700	9,827.00
800	13,656.00		
BEST SELLERS			LIST PRICE
Z1170-300-2IP			4,101.00
Z1170-600-3IP			8,348.00
Z1170-700-3IP			10,317.00
Z1170-700-3NH			10,317.00
Z1170-800-3IP			13,662.00
Z1170-800-4IP			13,662.00

*Regularly furnished unless otherwise specified. Items designated as Best Sellers are most specified and are generally in stock for shipment.

Size	Inlet/Outlet inch [mm]	Flow Rate gpm [LPM]	Capacity		Approximate Weight lb [kg]	Dimensions in inches [mm]			
			Water gallon [L]	Grease lb [kg]		C	D/E	F	G
100	2 [51]	4 [15]	3 [11]	8 [4]	42 [19]	10 [254]	7-1/4 [184]	20-3/8 [518]	9-7/8 [251]
200		7 [26]	5 [19]	14 [6]	53 [24]	11-1/4 [286]	8-1/8 [206]	21-3/4 [552]	11-7/8 [302]
300		10 [38]	6 [23]	20 [9]	66 [30]	11-3/4 [298]	8-1/4 [210]	25-1/8 [638]	14 [356]
400	3 [76]	15 [57]	10 [38]	30 [14]	83 [38]	13-3/8 [340]	9-3/8 [238]	27-1/8 [689]	16-3/4 [425]
500		20 [76]	16 [61]	40 [18]	99 [45]	15 [381]	11-3/4 [298]	30 [762]	17-1/4 [438]
600		25 [95]	21 [79]	50 [23]	124 [56]	17 [432]	12-1/2 [318]	32-1/4 [819]	19-7/8 [505]
700		35 [132]	30 [114]	70 [32]	151 [68]	18-3/4 [476]	14-1/4 [362]	34-1/8 [867]	22-1/2 [572]
800		50 [189]	40 [151]	100 [45]	180 [82]	21-1/2 [546]	16 [406]	36 [914]	24-1/2 [622]