


Z1182 SIDE ACCESS SOLIDS INTERCEPTOR



ENGINEERING SPECIFICATION

Zurn Z1182 side access solids interceptor features stainless steel construction. Ideal for suspended or under sink installations where there are height restrictions for a top removal solids interceptor. Furnished with removable sediment basket attached to a removable, gasketed, latched lid. All units have a high inlet and a low outlet on each side for right- or left-hand mounting.

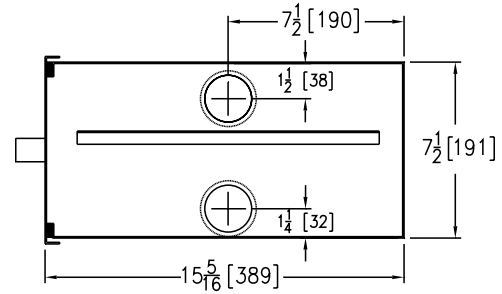

WIDTH = $11\frac{1}{2}$ [292]

PREFIXES	DESCRIPTION	LIST PRICE
ZS1182*	All Type 304 Fabricated Stainless Steel	8,250.00
SUFFIXES	DESCRIPTION	ADD
-YR	Replacement Stainless Steel Basket Assembly	2,846.00
BEST SELLER		LIST PRICE
Z1182-2IP		8,250.00

Inlet/Outlet inch [mm]	Flow Rate gpm [LPM]
2 [51]	35 [132]

Z1183 SOLIDS INTERCEPTOR




ENGINEERING SPECIFICATION

Zurn Z1183 solids interceptor features large capacity, acid resistant coated fabricated steel or stainless steel construction. Ideal for on floor or semi-recessed installation cores with screen attached to gasketed, removable, latched lid and removable sediment basket. Size to be used with corresponding Z1170, Z1172, or Z1173 grease interceptors.

CAUTION

Interceptors must be maintained periodically in order to ensure proper operation of the system. Follow cleaning schedule based on usage.

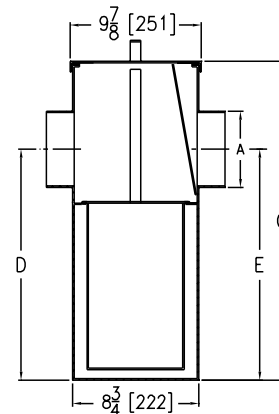

INLET G=WIDTH OF BODY OUTLET

PREFIXES	DESCRIPTION	SIZE	LIST PRICE
Z1183*	Acid Resistant Coated Fabricated Steel	100	1,946.00
		200	1,994.00
		300	2,096.00
		400	2,305.00
		500	2,494.00
		600	2,770.00
		700	2,991.00
		800	3,271.00
		900	3,613.00
ZS1183	All Type 304 Fabricated Stainless Steel	100	3,024.00
		200	3,212.00
		300	3,460.00
		400	3,900.00
		500	4,240.00
		600	4,933.00
		700	5,530.00
		800	6,230.00
		900	6,980.00
SUFFIXES	DESCRIPTION	ADD	
-CS	Custom Screens (Specify material and perforation size required.)	POA	
-YR	Replacement Stainless Steel Basket Assembly	POA	
BEST SELLERS		LIST PRICE	
Z1183-200-2NH		1,994.00	
Z1183-500-3NH		2,494.00	

Size	Inlet/Outlet inch [mm]	Flow Rate gpm [LPM]	Solid Capacity cu ft [cm ³]	Dimensions in inches [mm]			Approximate Weight lb [kg]
				C	D/E	G	
100	2 [51]	4 [15]	0.20 [0.06]	10 [254]	7-1/4 [184]	9-7/8 [251]	18 [8]
200		7 [26]	0.29 [0.08]	11-1/8 [283]	8-1/8 [206]	11-7/8 [302]	23 [10]
300	3 [76]	10 [38]	0.33 [0.09]	11-3/4 [298]	8-1/4 [210]	14 [356]	27 [12]
400		15 [57]	0.38 [0.11]	13-3/8 [340]	9-3/8 [238]	16-3/4 [425]	33 [15]
500		20 [76]	0.66 [0.19]	15 [381]	11-3/4 [298]	17-1/4 [438]	37 [17]
600	4 [102]	25 [95]	0.79 [0.22]	17 [432]	12-7/16 [316]	19-7/8 [506]	45 [20]
700		35 [132]	1.17 [0.33]	18-3/4 [476]	14-3/16 [360]		53 [24]
800		50 [189]	1.35 [0.38]	21-1/2 [546]	16 [406]	22-1/2 [572]	59 [27]
900		75 [284]	1.61 [0.46]	22-3/4 [578]	18-1/2 [470]		63 [29]

*Regularly furnished unless otherwise specified.

Items designated as Best Sellers are most specified and are generally in stock for shipment.

For additional product information, please visit www.zurn.com

INTRO
 ROOF DRAINS
 FLOOR DRAINS
 T, P, BW VALVES
 INTERCEPTORS
 CARRIERS
 HYDRANTS
 CLEANOUTS
 W/H
 SS DRAINS
 FAB SS DRAINS
 SANI-FLOOR
 TECH INFO