


**Z1172 LARGE CAPACITY GREASE INTERCEPTOR**



**ENGINEERING SPECIFICATION**

Zurn Z1172 large capacity grease interceptor features acid resistant coated interior and fabricated steel exterior, rated at \_\_\_ gpm and \_\_\_ lb grease capacity, internal air relief bypass, bronze cleanout plug (which can be used as a sampling port), and visible double wall trap seal with removable pressure equalizing/flow-diffusing baffle. Gasketed, non-skid, secured cover comes complete with removable lift handles, complete with flow control fitting. Regularly furnished with inlet and outlet in high position.

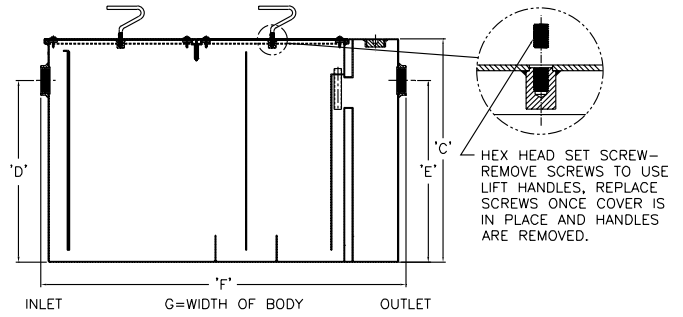

PREFIXES	DESCRIPTION	SIZE	LIST PRICE
<b>Z1172*</b>	Acid Resistant Coated Fabricated Steel	900	27,530.00
		1000	30,980.00
		1100	32,696.00
		1200	34,407.00
		1300	49,899.00
		1400	58,101.00
		1500	68,478.00
		1600	76,056.00
		1700	83,790.00
		1800	94,307.00
1900	99,176.00		

**ZS1172** All Type 304 Fabricated Stainless Steel **POA**

SUFFIXES	DESCRIPTION	ADD
<b>-AL</b>	Aluminum Cover	<b>POA</b>

	DESCRIPTION	SIZE	EA. ADDITIONAL 1" OVER 10"	
			UP TO 10"	
<b>-E</b>	Acid Resistant Coated interior and exterior fabricated steel extension section (specify 'C' dimension required) for recessed installation.	900	259.00	3,271.00
		1000	277.00	3,674.00
		1100	299.00	3,886.00
		1200	317.00	4,088.00
		1300	333.00	7,356.00
		1400	365.00	9,137.00
		1500	410.00	10,921.00
		1600	459.00	12,688.00
		1700	504.00	14,797.00
		1800	530.00	16,772.00
1900	547.00	19,068.00		

BEST SELLERS	LIST PRICE
Z1172-900-3IP	27,530.00
Z1172-1000-4IP	30,980.00
Z1172-1200-4IP	34,407.00
Z1172-1300-4IP	49,899.00
Z1172-1400-5IP	58,101.00
Z1172-1900-6IP	99,176.00

SUFFIXES	DESCRIPTION	SIZE	ADD
<b>-HD</b>	Heavy duty traffic cover rated at 10,000 lbs. maximum safe live load. A 3" minimum extension height is required when Heavy Duty Cover (-HD) option is specified.	900	8,749.00
		1000	12,038.00
		1100	13,209.00
		1200	15,457.00
		1300	17,629.00
		1400	24,332.00
		1500	31,237.00
		1600	36,834.00
		1700	42,419.00
		1800	48,472.00
1900	51,827.00		
<b>-K</b>	Anchor flange 1-3/4" down from top and 2" wide. A 3" minimum extension height is required when anchor flange (-K) option is specified (specify 'C' dimension required).	900	2,009.00
		1000	2,248.00
		1100	2,694.00
		1200	3,141.00
		1300	3,365.00
		1400	4,486.00
		1500	5,077.00
		1600	5,673.00
<b>-KC</b>	Anchor flange 1-3/4" down from top and 2" wide with clamp collar. A 3" minimum extension height is required when anchor flange (-KC) option is specified.	900	3,651.00
		1000	4,084.00
		1100	4,565.00
		1200	5,055.00
		1300	5,909.00
		1400	7,966.00
		1500	8,594.00
		1600	9,524.00
		1700	9,979.00
		1800	7,610.00
1900	11,326.00		
<b>-L</b>	Angle type (Z1108-L) flow control device with plunger		<b>N/C</b>
<b>-PW</b>	Plug Wrench		<b>83.00</b>
<b>-RE</b>	Recessing receiver enclosed type for recessed installation. Furnished with gasketed, non-skid cover with removable lift handles. (Sizes 900 & 1000 Only)		<b>POA</b>

Size	Inlet/Outlet inch [mm]	Flow Rate gpm [LPM]	Capacity		No. of Covers	Approximate Weight lb [kg]	Dimensions in inches [mm]			
			Water gallon [L]	Grease lb [kg]			C	D/E	F	G
900	3 [76]	75 [284]	65 [246]	150 [68]	1	316 [143]	22-3/4 [578]	18-1/2 [470]	36 [914]	28-5/8 [727]
1000		100 [379]	110 [416]	200 [91]		408 [185]	27 [686]	23 [584]	42-3/4 [1086]	33-5/8 [854]
1100		125 [473]	150 [568]	250 [113]		749 [340]	30-1/8 [765]	24-1/2 [622]	49-1/4 [1251]	40 [1016]
1200	4 [102]	150 [568]	195 [738]	300 [136]	2	856 [388]	30-3/4 [781]	25-1/4 [641]	56 [1422]	41-5/8 [1057]
1300		200 [757]	270 [1022]	400 [1881]		1016 [461]	35-1/2 [902]	29-7/8 [759]	61 [1549]	43-5/8 [1108]
1400		250 [946]	465 [1760]	500 [227]		1384 [628]	41 [1041]	36 [914]	71 [1803]	51-5/8 [1311]
1500	5 [127]	300 [1136]	665 [2517]	600 [272]	2	1770 [803]	46-1/4 [1175]	39-5/8 [1006]	80 [2032]	58-5/8 [1489]
1600		350 [1325]	865 [3274]	700 [318]		2096 [951]	50-1/2 [1283]	43-7/8 [1114]	87 [2210]	63-5/8 [1616]
1700		400 [1514]	1095 [4145]	800 [363]		2440 [1107]	54-1/4 [1378]	47-5/8 [1210]	94 [2388]	67 [1702]
1800	6 [152]	450 [1703]	1280 [4845]	900 [408]	3	2710 [1229]	55-1/4 [1403]	48-5/8 [1235]	100 [2540]	72 [1829]
1900		500 [1893]	1440 [5451]	1000 [454]		2857 [1296]	57-1/4 [1454]	51-5/8 [1311]	104 [2642]	74 [1880]

\*Regularly furnished unless otherwise specified.

Items designated as Best Sellers are most specified and are generally in stock for shipment.

For additional product information, please visit [www.zurn.com](http://www.zurn.com)